

75B4E30T 75" 4K UHD DIGITAL SIGNAGE DISPLAY



Hisense Digital Signage Displays are ideal for retail and business environments. The products are the perfect backbone of a digital broadcasting platform in supermarkets, restaurants, stadiums, shopping malls and office buildings. A combination of seamless design and enhanced 500 nits brightness will ensure your digital content vividly stands out from the crowd.

Highlights



Smart CMS

Hisense's CMS platform allows you to edit and arrange playlists, making content management easy and user-friendly. It supports all rich media content in synchronous playback over a multitude of commercial displays.



Landscape & Portrait

Both landscape and portrait orientations are possible, providing you with endless creative and functional possibilities to fulfill your commercial or informative goals.



178° Wide viewing angle

The wide viewing angle delivers consistent and accurate sharpness and color contrast for the best viewer experience.



Customization

Hisense displays support a variety of on-screen customizations such as custom startup logo, startup animation, wallpaper and many more. Creating a uniform look & feel for all viewers.







18/7 Operational Hours

Designed with dual-core System on Chip (SoC) technology the Hisense E series can be used for broadcasting both offline and cloud based content 18 hours a day, 7 days a week.



4K Ultra HD

The 4K Ultra HD picture quality ensures perfect color and rich details in all possible broadcasting surroundings, ranging from shops to restaurants and office buildings.

500 nits

With 500 nits maximum brightness the display panels can deliver amazingly vivid imagery anywhere during daytime and nighttime conditions.



Automatic time zone

When connected to the Internet each display will automatically synchronize to its local time zone. Making sure scheduled media broadcast is always in sync.



Hisense

Digital Display Panel

Backlight	DLED
Size	75"
Resolution	3840 x 2160
Refresh rate	60HZ
Color	1.07G (8 Bits+FRC)
Brightness	500 nits (typ)
Contrast (typ)	1200:1 (typ)
Response time (typ)	8ms (typ)
Viewing angle (Min.)	178°/178°
Color gamut	72%
Haze	1%
Orientation	Landscape & Portrait
Lifetime (typ)	50,000 Hours
Operational (Hours/Days)	18/7

Power

Input	AC 100V-240V @ 50/60HZ
Power Consumption	230W
Standby consumption	<0.5W (standby mode)

Physical

Bezel Color	Black
Set Dimension (W×H×D)	66.3 × 37.9 × 2.7 in
Bezel width (T/L/R/B)	T/B/L/R: 0.59 in
Net Weight	82.7 lbs
Packing Dimension (W×H×D)	72.8 × 45.6 × 8.0 in
Packed Weight	104.7 lbs
VESA	600mm x 400mm

System

05	Android 8.0	
DDR	ЗG	
ROM	16G	
Language	English	
Speaker		
Built in speaker	10W x 2	
Control Mothod		

IR

1 x RS232 (RJ45)

Control Method

Remote		
RS232		

Temperature
Humidity
What's in the box
Basic

Connectivity

WIFI

LAN

USB


Input Output

SD /TF Card

Environment

Dimensions

280.87mm

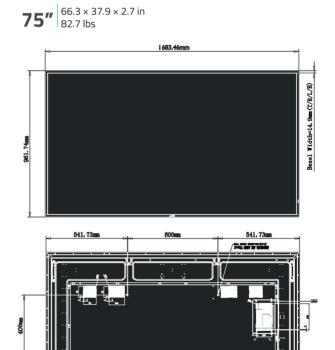

Yes

RJ45 × 1

Audio × 1

0 - 104°F 20% - 80%

Power cord Remote controller

RS232 cable Battery User manual HDMI Cable

Headphone Jack

 $\text{USB} \times 2/\text{HDMI} \times 2/\text{Audio in} \times 1$

 $TF \times 1$

HISENSE B2B USA 7310 McGinnis Ferry Rd Suwanee, GA 30024 **Hisense** Website: www.hisense-b2b.com Sales inquiries: sales@hisense_b2b.com

100mm 51.37mm

10

745. 23mm

100