Hisense



C5108

OPS ON-BOARD COMPUTER

Hisense Interactive displays comes with an OPS slot (Open Pluggable Specification) giving you the ability to integrate a computer in to the display. The integrated OPS computer utilises powerful Intel processors to bring you all the power of a desktop computer within the interactive display maximising its versatility and compatibility.

Highlights



10th Generation

10th Generation Intel desktop CoreTM i5 CPU



MSATA System Disk

Support quick start of MSATA system disk and one click restore to enhance user experience



Update System to Win10 lot Enterprise LTSC

Windows 10 IoT Enterprise is a streamlined version of Windows 10 that is designed for use on Internet of Things (IoT) devices.



HD Graphics

The standard Intel HD graphics 630 integrated graphics card supports h.265 and 4K



Support WiFi 5 and Wired Network


Wifi 5 or IEEE 802.11ac is the fifth generation of wireless networking standards in the IEEE 802.11 set of standards which provides high throughput in a wireless local area network (LAN)




Support Bluetooth 4.2

Version 4.2 makes Bluetooth smarter, faster and the ideal wireless technology supporting up to 1Mbps.

Display Dimensions



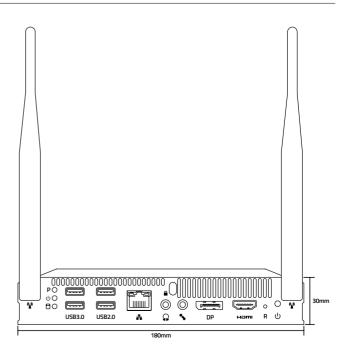





Specifications

System

| CPU | Intel Core™I5-10400 |
|--------|---------------------------|
| RAM | 8GB |
| SSD | 128G |
| System | Win10 lot Enterprise LTSC |

Motherboard Interface

| LAN | Integrated 10/100/1000M Adaption |
|-----------|----------------------------------|
| WiFi | WiFi 5 11ac |
| Bluetooth | Bluetooth 4.2 |
| USB 3.0 | 2 |
| USB 2.0 | 2 |
| HDMI Out | 1 |
| DP Out | 1 |
| VGA | N/A |
| Mic In | 1 |
| Line | 1 |
| HDD LED | 1 |
| Power LED | 1 |

Power

| Power Requirements | 12V-19V DC |
|--------------------|------------|
| Max Power | 90W |
| Standby Power | 0.5W |

Physical Specifications

| Color | Black |
|-----------------|----------------|
| Dimension L*W*H | 180*195*30(mm) |
| Net Weight | 1.4kg |

Environmental Conditions

| Operation Temperature | 0 C - 40 C |
|-----------------------|------------|
| Operation Humidity | 10%-90% |
| Storage Temperature | -20 C-60 C |
| Storage Humidity | 10% - 90% |

