


XOM SERIES

P10 OUTDOOR LED DISPLAY

XOM series outdoor LED solutions are perfect for any billboard or large scale LED wall project. These ultra reliable, high brightness, low power consumption modules also feature an IP65 rating and auto brightness adjustment for the ultimate impact in any climate or weather conditions. Hisense LED modules include cable-less internal construction and rear access for ease of maintenance.

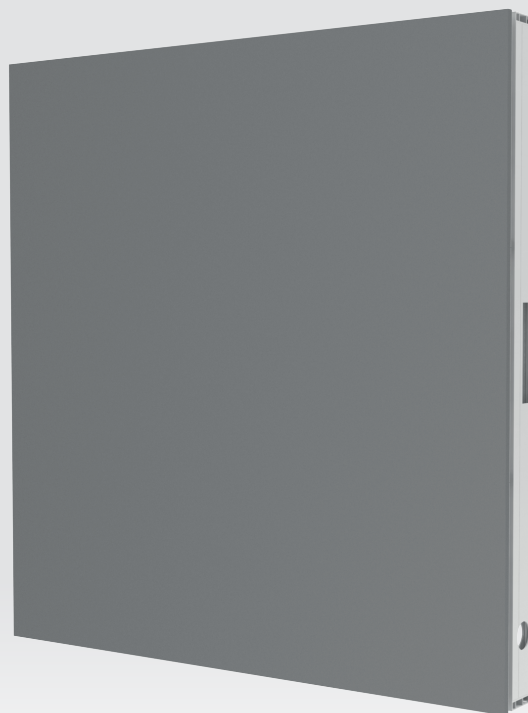

Highlights



Bright & Vivid Images

6500 nits high brightness, bright and vivid display, can be seen from a distance



Neat and Clean Screen

Clean cable solution, make the screen clear and beautiful.



45° Beveled Edge Design

45° beveled edge design, easy to complete multiple curved surface splicing, up to -90°~90° curved surface installation.



EMC Anti-Interference

Complies with international electronic EMC standards. Anti-electromagnetic interference, more stable operation




24kg Lightweight Design

It takes only 2 minutes to splice two cabinets together, saving labor costs dramatically.



Front & Rear Access

Supports front maintenance. No need to reserve space for maintenance.

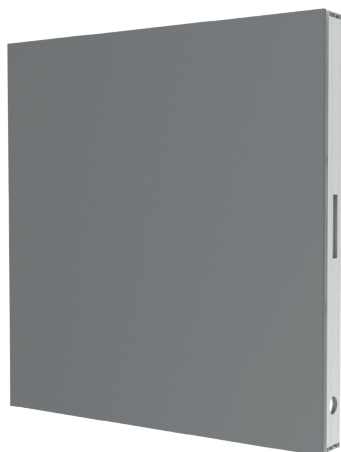

Specifications

XOM100A

Pixel Pitch	10
LED Package	SMD
LED Type	SMD2727
Thickness	106mm / 4.17inch
Module Resolution	48 x 32
Module Size (WxH)	480 x 320mm / 18.9 x 12.6inch
Cabinet Dimension (WxH)	960(W)x960(H) / 37.8(W) x 37.8(H)
Cabinet Resolution	96 x 96
Cabinet Weight (panel)	≤24kg / ≤52.91lbs
Cabinet materials	Profile Aluminium
Brightness (Nits)	6500(typ.) (5000-6500 Adjustable)
Contrast Ratio	≥4000:1
Maintenance	Front & Rear Access
IP Rating	Front:IP65/Rear:IP65
Max Power Consumption (W/sqm)	≤780
Avg Power Consumption (W/sqm)	≤250
Viewing Angle (H/V)°	≥140 degrees / 120 degrees
Refresh Rate (Hz)	1920~3840
Operating Environment	From -20~60°C
Relative Humidity	10~90%RH
Life Span	≥100,000hrs

Display Dimensions

