

## S02EMS7CA51B

### OPS ON BOARD COMPUTER

Hisense Interactive displays comes with an OPS slot (Open Pluggable Specification) giving you the ability to integrate a computer into the display. The integrated OPS computer utilises powerful Intel processors to bring you all the power of a desktop computer within the interactive display maximising its versatility and compatibility. It can be used in education, conference whiteboards and digital signage and other scenarios.



### Highlights



#### 12th Generation

Intel 12th generation Core i7 processor



#### Single-Channel Memory

Dual-channel memory, support up to 32GB



#### Multiple Storage Methods

Support M.2 SATA /NVME multiple storage methods, TPM encryption



#### Support Bluetooth 5.2

Version 5.2 makes Bluetooth smarter, faster and the ideal wireless technology supporting up to 1Mbps.



#### MSATA System Disk

Support one click restore to enhance user experience



#### Support WiFi 6 and Wired Network

WiFi 6 (IEEE 802.11ax) is the sixth-generation wireless network standard in the IEEE 802.11, providing high throughput in wireless local area networks (LANs).



#### Security without worries

Update System to Win 11 Pro, an operating system that supports a zero-trust security model can protect data and access security anytime, anywhere.



#### Efficient productivity

With a streamlined user interface, easily organized snap layouts, and personalized widgets, employees can work more easily and without burden.





## Specifications

### OPS

<b>Model Name</b>	S02EMS7CA51B
<b>CPU</b>	Intel Core TM I7-12650H
<b>RAM</b>	16GB
<b>SSD</b>	512G
<b>LAN</b>	Integrated 10/100/1000M Adaption
<b>WIFI</b>	WIFI 6
<b>Bluetooth</b>	Bluetooth 5.2
<b>USB 3.0</b>	4
<b>USB 2.0</b>	2
<b>HDMI out</b>	1 (2.0)
<b>DP out</b>	1 (1.2)
<b>VGA</b>	/
<b>Mic in</b>	1
<b>Line out</b>	1
<b>HDD LED</b>	1
<b>Power LED</b>	1
<b>Power Requirements</b>	12V-19V DC
<b>Max Power</b>	90W
<b>Standby Power</b>	0.5W
<b>Color</b>	Black
<b>Dimension LxWxH</b>	180x195x30(mm)
<b>Net Weight</b>	About 1.4kg
<b>Operation Temperature</b>	0° C - 40° C
<b>Operation Humidity</b>	10%-90%
<b>Storage Temperature</b>	-20° C - 60° C
<b>Storage Humidity</b>	10% - 90%
<b>System</b>	Win11-Pro
<b>Certification</b>	CB/CE/cTUVus/UKCA/FCC/IC
<b>Adaptive Model</b>	65MR6DE/75MR6DE/86MR6DE/65MR6DE-E/75MR6DE-E/86MR6DE-E/65MR61DE-E/75MR61DE-E/86MR61DE-E/86X1EE

## Dimensions

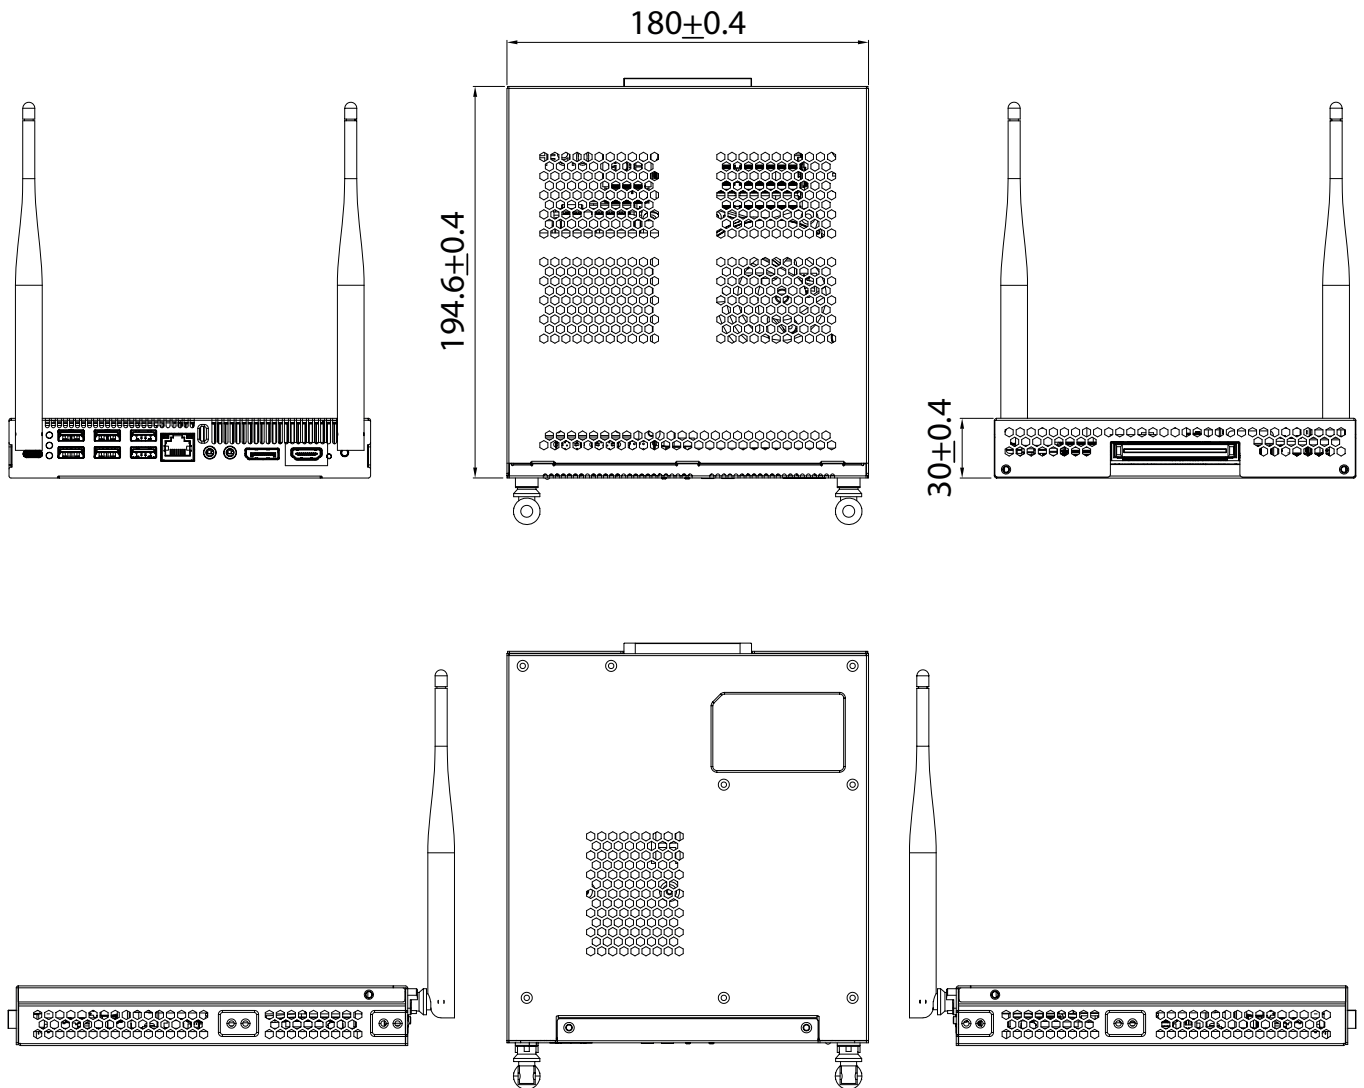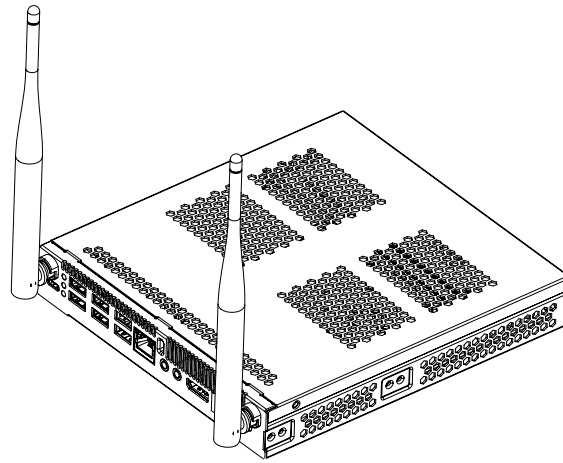

\* Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.