Hisense



SO2EMS3C821D OPS ON BOARD COMPUTER

Hisense Interactive displays comes with an OPS slot (Open Pluggable Specification) giving you the ability to integrate a computer into the display. The integrated OPS computer utilises powerful Intel processors to bring you all the power of a desktop computer within the interactive display maximising its versatility and compatibility. It can be used in education, conference whiteboards and digital signage and other scenarios.

Highlights



Support WiFi 6 and Wired Network

WiFi 6 (IEEE 802.11ax) is the sixth-generation wireless network standard in the IEEE 802.11, providing high throughput in wireless local area networks (LANs).



Security without worries

Update System to Win 11 Pro, an operating system that supports a zero-trust security model can protect data and access security anytime, anywhere.



Support Bluetooth 5.2

Version 5.2 makes Bluetooth smarter, faster and the ideal wireless technology supporting up to 1Mbps.



Efficient productivity

With a streamlined user interface, easily organized snap layouts, and personalized widgets, employees can work more easily and without burden.





Hisense

Specifications

OPS

Model Name	S02EMS3C821D
CPU	Intel Core TM I3-1215U
RAM	8GB
SSD	256GB
LAN	Integrated 10/100/1000M Adaption
WIFI	WIFI 6
Bluetooth	Bluetooth 5.2
USB 3.0	x4
HDMI out	x1 (2.0)
DP out	x1
VGA	/
Mic in	x1
HDD LED	x1
Power LED	x1
Power Requirements	12V-19V DC
Max Power	80.7W
Standby Power	2.9W
Color	Black
Dimension LxWxH	180x119x30(mm)
Net Weight	0.97kg
Operation Temperature	-10° C - 45° C
Operation Humidity	10%-90%
Storage Temperature	-20° C - 60° C
Storage Humidity	10% - 90%
System	Win11-Pro
Certification	CB / CE / cTUVus / UKCA / FCC / IC
Adaptive Model	75WE2FE / 65WE3FE / 75WE3FE / 86WE3FE


* Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.


Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com




Hisense

Dimensions



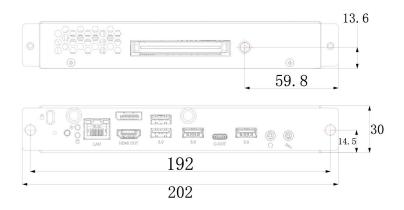

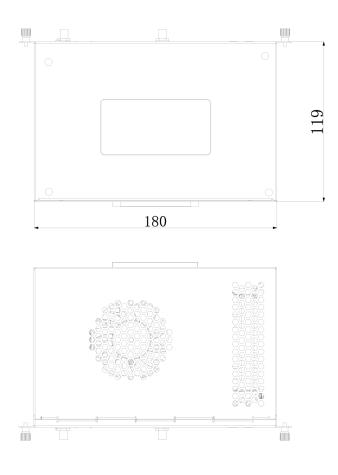

* Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com

