

RIL SERIES

QUICK-INSTALL INDOOR RENTAL LED DISPLAY

Featuring quick installation and easy maintenance, with a 7680Hz refresh rate and 4000:1 contrast ratio, the RIL Series delivers true-to-life images and reliable performance, while its 45° edge-cutting design and adjustable angle configurations from outer -10° to inner +10° help you realize creative curved installation effortlessly. Additionally, the series presents a versatile range of pixel pitches from 1.9mm to 3.9mm.



Highlights



Quick Installation and Easy Maintenance

The RIL series supports rear installation and maintenance, wall-mounting and hanging are selectable for this versatile display, making it adaptable to various scenarios.



Anti-collision Design

A high-brimmed protective face shield prevents the LED lamp bead from impact, and flip-over protective corners around the cabinet can effectively protect the edge LED.



Simple but Durable

Featuring hardwired independent central control, the RIL series has a sleek and modern look that is also reliable at the same time.



Eye-catching Display

With a brightness of 600 nits, a refresh rate of up to 7680Hz, and a contrast ratio of 4000:1, the display shows vibrant colors to create eye-catching images.




Energy-saving and Low Power Consumption

Utilizing a low-power 4.5V power supply, the display is optimized for energy efficiency and minimal resource use to realize low operational costs.



Creative Curved Installation

The RIL features a 45° edge-cutting design on both sides, enabling the panel to create 90° arc display. It offers adjustable angle configurations from outer -10° to inner +10° to create a curved screen with high flatness.

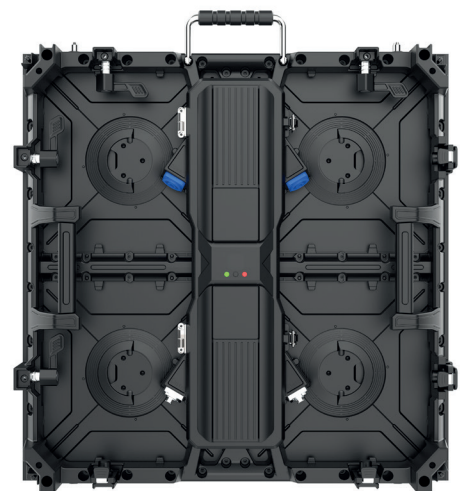

Specifications

RIL026FE

Pixel Pitch	2.604mm
Pixel Configuration	SMD Copper Wire SMD1515
Module Resolution (W x H)	96 x 96
Module Dimension (W x H)	250 x 250mm / 9.84 x 9.84inch
Cabinet Resolution (W x H)	192 x 192 / 192 x 384
Cabinet Dimension (W x H x D)	500 x 500 x 85mm 19.69 x 19.69 x 3.34inch 500 x 1000 x 85mm 19.69 x 39.37 x 3.34inch
No. of Modules per Cabinet (W x H)	2 x 2 / 2 x 4
Cabinet Weight	6.5kg / 14.33lbs 12kg / 26.45lbs
Cabinet materials	Die-cast Aluminium
Brightness (typ.)	600 nits
Contrast Ratio	4,000 : 1 (According to the current Hisense test environment)
Visual Viewing Angle (H x V)	150° x 140°
Bit Depth	14 bit
Colour Temperature	6500K ± 500K
Max Power Consumption	320 (W/m ²) 80 / 160 (W/Cabinet@500 x 500 mm / 500 x 1,000 mm)
Avg Power Consumption	140 (W/m ²) 35 / 70 (W/Cabinet@500 x 500 mm / 500 x 1,000 mm)
Max Heat Generation	1,092 (BTU/m ²) 273 / 546 (BTU/Cabinet@500 x 500 mm / 500 x 1,000 mm)
Avg Heat Generation	478 (BTU/m ²) 120 / 239 (BTU/Cabinet@500 x 500 mm / 500 x 1,000 mm)
Power Supply	100~240 V AC
Refresh Rate	7680 Hz
Operating Temp / Humidity	-10~40°C / 10~80% RH
Storage Temp / Humidity	-20~50°C / 10~85% RH
IP Rating	Front IP30 & Rear IP30
Lifetime	100,000 Hrs
Maintenance	Rear Access

Display Dimensions

